




SKF BEARING MANUFACTURING CO.,LTD.

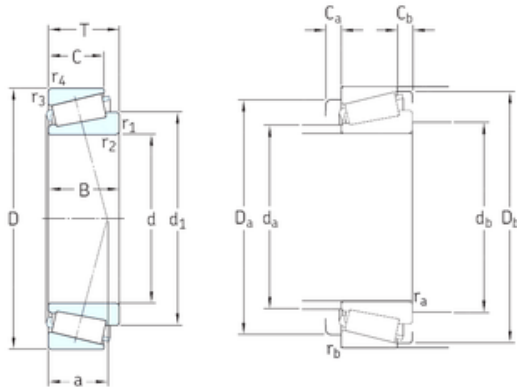

66,675 mm x 112,712 mm x 30,048 mm SKF
3984/2/3920/2/Q tapered roller bearings

Bearing No. 3984/2/3920/2/Q

3984/2/3920/2/Q Bearing 2D drawings and 3D CAD models

Size	66.675x112.712x30.162 mm
Bore Diameter	66,675 mm
Outer Diameter	112,712 mm
Width	30,162 mm
d	66,675 mm
D	112,712 mm
T	30,162 mm
B	30,048 mm
C	23,812 mm
a	25 mm
d1	87,9 mm
r1 min.	3,5 mm
r2 min.	3,5 mm
r3 min.	3,3 mm
r4 min.	3,3 mm
Ca min.	4 mm
Cb min.	6 mm
da max	75 mm
Da min	96 mm
Da max.	101 mm
db min	78,5 mm
Db min.	105 mm
ra max.	3,3 mm
rb max.	3,1 mm
Weight	1,15 Kg



SKF BEARING MANUFACTURING CO.,LTD.

Basic dynamic load rating (C)	123 kN
Basic static load rating (C0)	183 kN
Fatigue load limit (Pu)	21,2
Reference speed	4300 r/min
Limiting speed	6300 r/min
Calculation factor (e)	0,4
Calculation factor (Y)	1,5
Category	Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	7316573301073
Product Group	B04334