




SKF BEARING MANUFACTURING CO.,LTD.

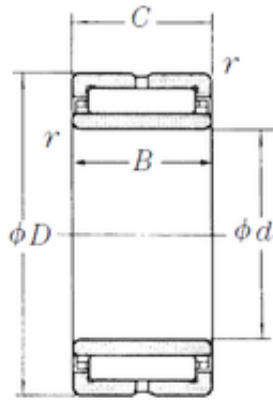

80 mm x 110 mm x 30 mm NSK NA4916 needle roller bearings

Bearing No. NA4916

NA4916 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|--------------|
| Size | 80x110x30 mm |
| Bore Diameter | 80 mm |
| Outer Diameter | 110 mm |
| Width | 30 mm |
| d | 80 mm |
| Fw | 90 mm |
| D | 110 mm |
| B | 30 mm |
| C | 30 mm |
| r min. | 1 mm |
| da min. | 85 mm |
| Da max. | 105 mm |
| ra max. | 1 mm |
| Weight | 0,835 Kg |
| Basic dynamic load rating (C) | 87,5 kN |
| Basic static load rating (C0) | 166 kN |
| (Grease) Lubrication Speed | 2800 r/min |
| hidYobi | NA4916 |
| LangID | 1 |
| D_ | 110 |
| B_ | 30 |
| hidTable | ecat_NS MRNR |
| GRS rpm | 2800 |
| ra | 1 |
| da_min | 85 |



SKF BEARING MANUFACTURING CO.,LTD.

| | |
|------------|----------|
| d2 | 80 |
| C0 | 166 |
| C1_ | 30 |
| DE_ | 103 |
| SLR | 22.4 |
| Prod_Type3 | NRB_S_NA |
| DA_ | 6.5 |
| Z_ | 30 |
| SI | 90 |
| yobi | NA4916 |
| da_max | 105 |
| OIL rpm | 4500 |
| SDM_ | 96.5 |
| r | 1 |
| KBRG | 8353 |
| mass2 | 0.835 |
| B1 | 30 |